



 **Ravaglioli**



## **LEGEND SERIES**

Advantages for  
the operator



Modern and innovative design.



Technology consolidated by Ravaglioli's many years of engineering expertise.



Quick vehicle positioning and convenient door opening.



**Energy kit**  
(230 V - compressed air) on selected models.



Push button controls (only in models with TEq-Link).



Cleaner workplace thanks to internal trolleys.



Lifts designed for easier and faster maintenance.



Lifts with quick-connect arm ends for quick assembly and use of the corresponding accessories.



Accessory configuration example:

VSG.2CALL.901163



VSG.2CALL.901071



TEq-Link on selected models for:

- View statistics of lift usage.
- Check the preventive maintenance.
- Manage workstations.
- Manage work orders.



50% longer, bronze load nut.



Motors with reinforced and cooling casing.



Solid automatic arm locking.



Aluminum pulley with cooling function.




Long lasting bearings.

**LIFTABLE VEHICLES**

The design of the arms allows optimal and versatile loadability for a wide range of vehicles.

Technical drawing of KPX32 model  
(To view technical drawings of the other models in the series, please visit the product page on the website)

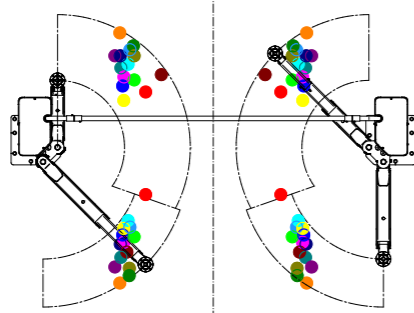

- |                  |                    |
|------------------|--------------------|
| ● SMART          | ● AUDI - A3        |
| ● BMW - G12      | ● VW - TOURREG     |
| ● BMW - Z4       | ● AUDI - Q7        |
| ● BMW - i3       | ● VW - ID4         |
| ● BMW - E83      | ● AUDI - Q4 E-TRON |
| ● RENAULT - CLIO | ● TESLA - MODEL X  |
| ● VW - TIGUAN    | ● RENAULT - ZOE    |

**KPX32-KPX35**  
Overall dimensions: 3350 mm - 3250 mm  
Adjustable distance: 2700 mm - 2600 mm


**KPX42-KPX55**  
Overall dimensions: 3528 mm - 3428 mm  
Adjustable distance: 2800 mm - 2700 mm



Acoustic foot protection system. (CE-stop, no mechanical foot guards).

**A new range of accessories to intensify performance.**





Columns turned with corner carriages.

**KPE32**


3200 kg

**KPX32-KPX35**


KPX32 - 3200 kg  
KPX35 - 3500 kg

**KPX42**


4200 kg

**KPX55**


5500 kg



**Discover the whole series.**



	Item no.	Control	Energy kit	Double control panel	TEq-Link	Driving power	Power supply
KPE32	RAV.KPE32.198662	rotating switch				2x2.6 kW	400 V   50 Hz
KPX32	RAV.KPX32.198570	switch				2x2.6 kW	400 V   50 Hz
KPX32P	RAV.KPX32.198624	push buttons	✓		✓	2x2.6 kW	400 V   50 Hz
KPX35	RAV.KPX35.199010	push buttons			✓	2x2.6 kW	400 V   50 Hz
KPX35E	RAV.KPX35.199157	push buttons	✓		✓	2x2.6 kW	400 V   50 Hz
KPX42	RAV.KPX42.198259	push buttons			✓	2x3.5 kW	400 V   50 Hz
KPX42E	RAV.KPX42.198303	push buttons	✓	✓	✓	2x3.5 kW	400 V   50 Hz
KPX42LIK	RAV.KPX42.198440	push buttons			✓	2x3.5 kW	400 V   50 Hz
KPX42ELIK	RAV.KPX42.198488	push buttons	✓	✓	✓	2x3.5 kW	400 V   50 Hz
KPX55LIKTA	RAV.KPX55.198945	push buttons			✓	2x3.5 kW	400 V   50 Hz
KPX55ELIKTA	RAV.KPX55.198976	push buttons	✓	✓	✓	2x3.5 kW	400 V   50 Hz