





Ravaglioli

RAV 3DTower.4 3D tower



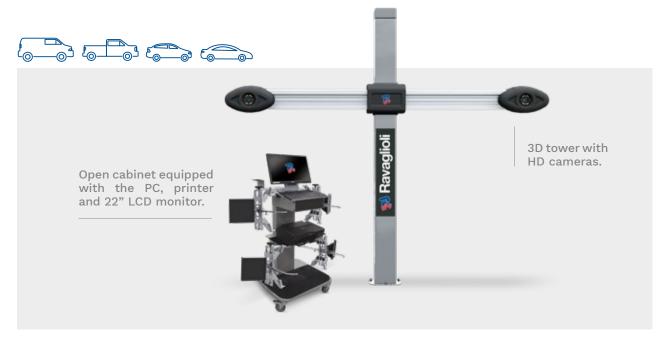


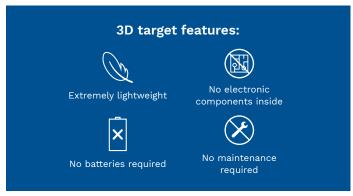







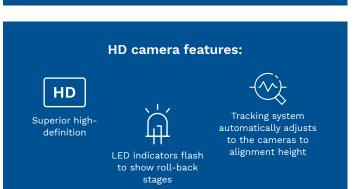





Automatic tower movement.

The tower follows the vehicle as it's raised and lowered on the lift, eliminating the need for manual readjustment of the camera and reducing time spent at the console so shops can perform fast and efficient alignments.





Technical data

	RAV3DTower.4	
	RAV.3DTOW.702050	
Individual toe front/rear axle	+/- 42"	
Total toe	+/- 42"	
Toe-out on turns	+/- 42"	
Camber front/rear axle	+/- 56"	
Caster	+/- 32"	
SAI	+/- 32"	
Set-back	+/- 36"	
Set-back front axle	+/- 36"	
Thrust angle	+/- 36"	
Min. tyre size	10"	
Max. tyre size	24"	
Max. wheel diameter	610 mm	
Display	LCD	
Display size	22"	
Power supply	230 V 50-60 Hz	
Width	2950 mm	
Depth	455 mm	
Height	2900 mm	
Weight	250 kg	
Wheel Track	≤ 2650 mm	
Wheel Base	≤ 5450 mm	
Wheel Deviation	≤ 1800 mm	

CONFIGURATION				
		Colour	Standard equipment	
RAV3DTower.4	RAV.3DTOW.702050	RAL7040	clamps with target, S110A7/P turnables, STDA161 steering wheel lock, 10479 brake pedal depressor	

RAV Italy Vehicle Service Group Italy S.r.l.	RAV France RAV France SARL	RAV Germany BlitzRotary GmbH	RAV UK Vehicle Service Group UK Ltd
Via Filippo Brunelleschi 9 44020 Ostellato (FE) Italy	4, Rue De Longue Raie ZAC de la Tremblaie 91220 Le Plessis Pâté France	Hüfinger Straße 55 78199 Bräunlingen Germany	3 Fourth Avenue, Bluebridge Industrial Estate Halstead, Essex, CO9 2SY United Kingdom
 \$\&\ +39.051.6781511 \$\overline{\overli	 \$\&\ +33.1.60.86.88.16 \$\Begin{align*} = +33.1.60.86.82.04 ✓ Info.fr@ravaglioli.com 	 6 +49.771.9233.0 6 +49.771.9233.99 ✓ ravd@ravaglioli.com 	 6 +44.1787.477711 6 +44.1787.477720 ✓ rav@ravaglioli.com

DRF25 (01)