


Bedieneinheit wahlweise rechts oder links möglich
operating unit alternatively right or left side possible

Betonqualität
quality of concrete min. C20/25
normal bewehrt
normal armouring

Bauseits am Bedienpult bereitstellen:
Netzanschluss: 3PH+PE, 400V, 50Hz
Motorleistung: 3,5 kW
Absicherung: 10 Ampere träge
Kabellänge: ca. 2m, 4 x 4mm²
Druckluft R3/8" oder Schlauch DN10, 6-8 bar

Wir weisen in unseren Plänen auf die Mindestanforderung des Fundamentes hin, jedoch der Zustand der örtlichen Gegebenheiten (z.B. Untergrund, Ausführung etc.) obliegt nicht unserer Verantwortung. Die Ausbildung der Einbausituation muss vom planenden Architekten bzw. Statiker im speziellen Fall individuell spezifiziert werden.

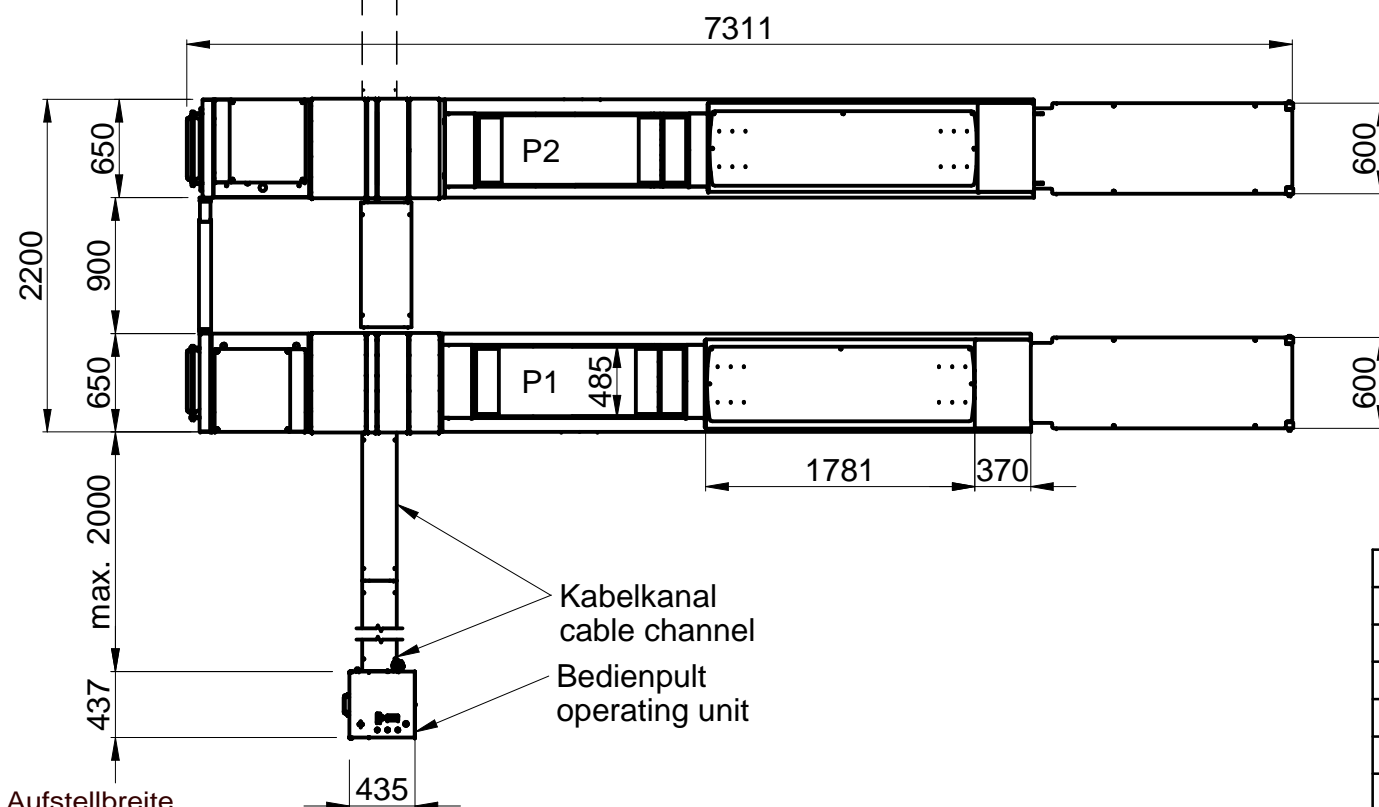


Prepared by customer at the main operating unit:
power supply: 3PH+PE, 400V, 50Hz
Motor power 3,5 kW
fuse: 10 Ampere, time lag
cable diameter: 4 x 4mm²
cable length: approx. 2m
optional: R3/8" or hose DN10, 6-8bar

We point out the minimum requirement of the foundation in our plans. The condition of the local realities for example: the ground under the foundation) does not lie in our responsibility. The execution of the installation situation must be individually specified by the planning architect or by the engineer engaged in statically calculations in the special case.

Alle Maße in Millimeter
all dimensions in millimeter

Maß- und Konstruktionsänderungen vorbehalten!
subject to alterations!

				THIRD ANGLE PROJECTION		S50LTAK55CAT-PD8 + S42AKA2 Data sheet													
				UNLESS OTHERWISE NOTED: ANGULAR DIMENSIONS: +/- 1 OTHER DIMENSIONS: +/- 0.8mm (< 305mm) +/- 1.6mm (> or= 305mm)		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED: 0.8mm MIN. CORNER BREAK REMOVE ALL BURRS													
				NOTES: Tragfähigkeit/capacity: 5000 kg															
				The design and detail illustrated in this drawing is the property of Vehicle Service Group. It is being loaned with the expressed condition that it will not be duplicated or used except by permission and is subject to return upon request.		<table border="1"> <tr> <td>DRAWN</td> <td>DATE</td> <td>SHEET</td> </tr> <tr> <td>M.D.</td> <td>06.04.2021</td> <td></td> </tr> <tr> <td>APPROVED</td> <td></td> <td>DRAWING NUMBER</td> </tr> <tr> <td></td> <td></td> <td>S50LTAK55CAT-PD8 + S42AKA2(059208960)</td> </tr> </table>		DRAWN	DATE	SHEET	M.D.	06.04.2021		APPROVED		DRAWING NUMBER			S50LTAK55CAT-PD8 + S42AKA2(059208960)
DRAWN	DATE	SHEET																	
M.D.	06.04.2021																		
APPROVED		DRAWING NUMBER																	
		S50LTAK55CAT-PD8 + S42AKA2(059208960)																	
REV	CO NUM	DATE	BY																

* empfohlene Aufstellbreite
recommended installation width