

TIRE CHANGER

ELECTRIC-PNEUMATIC, WITH MOUNTING HEAD AND TYRE LEVER

The electric-pneumatic tyre fitting machine


HP440Q.22 / HP440Q.22 Plus is suitable for passenger cars with a rim diameter of 10 to 22 inches.

It is available in both the Basic version as well as the Plus version with lifting arm.

+ For rim diameters from 10 to 22 inches
+ With mounting head and tyre lever
+ Basic model with good price-performance ratio, available in two versions



HIGHLIGHTS IN DETAIL




- 1 Removable pedal unit for easy maintenance
- 2 Maintenance unit with pressure regulator

ACCESSORIES ON REQUEST

- + Retrofit helper arm (Plus73 for HP440Q.22)
- + Plastic protection for bead breaker blade (5 pieces; 811059)

HP440Q.22

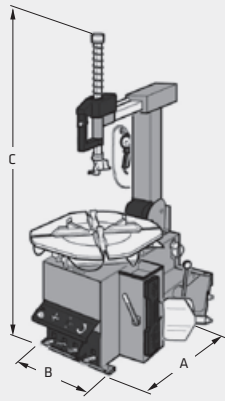


Model	HP440Q.22	HP440Q.22 Plus
Clamping range inside	13-23" (12-22", 14-24") ¹	13-23" (12-22", 14-24") ¹
Clamping range outside	11-21" (10-20", 12-22") ²	11-21" (10-20", 12-22") ²
Wheel width max.	13"	13"
Wheel diameter max.	1000 mm	1000 mm
Wheel weight max.	75 kg	75 kg
Automatic bead-breaking movement	X	X
Bead-breaking force	3000 kg	3000 kg
Rotation speed	7/14 rpm	7/14 rpm
Torque max.	1200 Nm	1200 Nm
Motor power	max. 1,1 kW	max. 1,1 kW
Electrical connection	3 Ph, 400 V	3 Ph, 400 V
Fuse protection	16 A träge	16 A träge
A Width	1120 mm	1120 mm
B Depth	1580 mm	1580 mm
C Height	1890 mm	1890 mm
Weight	229 kg	251 kg
Article number	812461	812465

¹ The clamping range can be decreased to 12-22 inches or increased to 14-24 inches by unscrewing an inner hexagonal screw located on each clamping jaw.

² The clamping range can be decreased to 10-20 inches or increased to 12-22 inches by unscrewing an inner hexagonal screw located on each clamping jaw.

SCOPE OF DELIVERY



- 1** Clamping jaws Plastic protection (G800A131)
 - 2** Mounting head Plastic protection (G800A132)
 - 3** Helper arm incl. pneumatic bead depressor (for Plus Version)
 - 4** Tire filler operation via foot pedal
- + Bead breaker blade plastic protection (1 piece; 811797)