

# TOMORROW SERIES



Advantages for the operator






Quick vehicle positioning and convenient door opening.



Energy kit (230 V - compressed air) on selected models.



Acoustic foot protection system. (CE-stop, no mechanical foot guards).



Lifts with quick-connect arm ends for quick assembly and use of the corresponding accessories.



Push button controls (only in models with TEq-Link).



Cleaner workplace thanks to internal trolleys.

Accessory configuration example:



VSG.2CALL.901163




VSG.2CALL.901071

**New accessories to enhance the journey into the future.**



**SPMA32-X-SPMA35-X**  
Overall dimensions: 3350 mm - 3250 mm  
Adjustable distance: 2700 mm - 2600 mm

**SPMA42-X-SPM55-X**  
Overall dimensions: 3528 mm - 3428 mm  
Adjustable distance: 2800 mm - 2700 mm



Lifts designed for easier and faster maintenance.




TEq-Link on selected models for:

- View statistics of lift usage.
- Check the preventive maintenance.
- Manage workstations.
- Manage work orders.

**LIFTABLE VEHICLES**

The design of the arms allows optimal and versatile loadability for a wide range of vehicles.

Technical drawing of SPMA32-X model (To view technical drawings of the other models in the series, please visit the product page on the website)

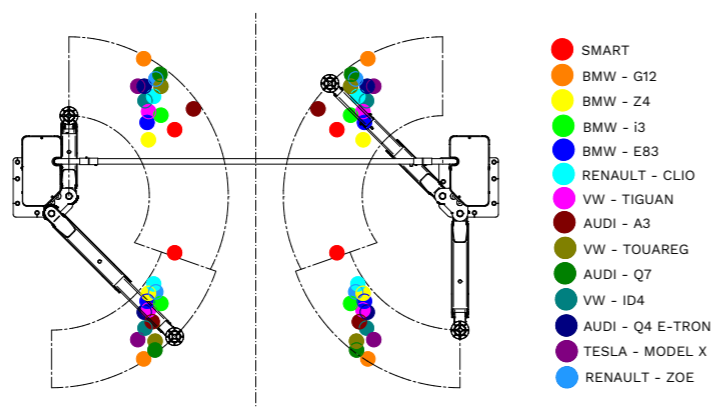

Modern and innovative design.



Technology consolidated by Rotary many years of engineering expertise.



Solid automatic arm locking.



Aluminum pulley with cooling function.



Long lasting bearings.



50% longer, bronze load nut.



Motors with reinforced and cooling casing.




# Tomorrow is Now

**SPM32-E**

**SPMA32-X  
SPMA35-X**

**SPM42**

**SPM55**

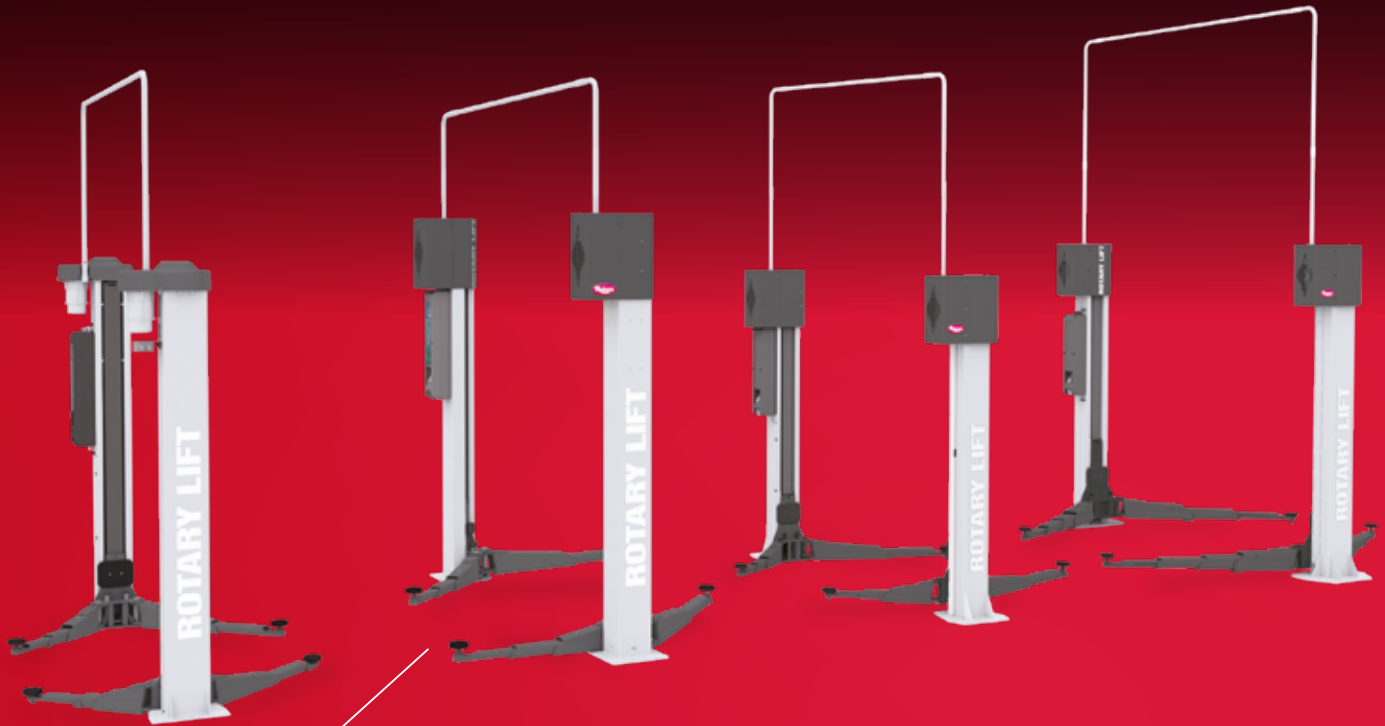

3200 kg



SPMA32-X - 3200 kg  
SPMA35-X - 3500 kg



4200 kg



5500 kg



Columns turned with corner carriages.

**Discover the whole series.**



	Item no.	Control	Energy kit	Double control panel	TEq-Link	Driving power	Power supply
SPMA32-E	ROT.SP32E.198273	rotating switch				2x2.6 kW	400 V   50 Hz
SPMA32-X	ROT.SP32X.198549	switch			✓	2x2.6 kW	400 V   50 Hz
SPMA32-XP	ROT.SP32X.198723	push buttons	✓	✓	✓	2x2.6 kW	400 V   50 Hz
SPMA35-X	ROT.SP35X.199263	push buttons			✓	2x2.6 kW	400 V   50 Hz
SPMA35-XE	ROT.SP35X.198990	push buttons	✓	✓	✓	2x2.6 kW	400 V   50 Hz
SPMA42-X	ROT.SP42X.198464	push buttons				2x3.5 kW	400 V   50 Hz
SPMA42-XE	ROT.SP42X.199096	push buttons	✓	✓	✓	2x3.5 kW	400 V   50 Hz
SPM42-XL	ROT.SP42X.198877	push buttons				2x3.5 kW	400 V   50 Hz
SPM42-XEL	ROT.SP42X.198761	push buttons	✓	✓	✓	2x3.5 kW	400 V   50 Hz
SPM55-XEL	ROT.SP55X.198839	push buttons	✓	✓	✓	2x3.5 kW	400 V   50 Hz